

Pure drinking Water systems

CONTENTS

- 
- 01 DESKTOP WATER
PURIFIER (DIRECT DRINKING)
 - 02 STANDING WATER DISPENSER &
PURIFIER WITH RO
 - 03 DESKTOP WATE
PURIFIER (DIRECT DRINKING)
 - 04 WALL-MOUNTED WATER PURIFIER
 - 05 STANDING WATER DISPENSER &
PURIFIER WITH RO
 - 06 HOT & COLD WATER DISPENSER
WITH REFRIGERATOR

DESKTOP WATER PURIFIER (DIRECT DRINKING)



Model: JL1645T-Z

Power Supply Voltage & Frequency (V/Hz):
220-240V/50-60HZ
Power Consumption: 555W
Purification Capacity: 2L/min
Total Water Tank Capacity: 2.2L(1.3Lcold tank;
0.9Lhot tank)
Cold Water Output: $\geq 1.2\text{L/min}$
Hot Water Output: $\geq 1.2\text{L/min}$
Cooling Capacity (lt/hr): $\geq 3\text{L/H} \leq 10^\circ\text{C}$
Cooling Power (W): 100W
Heating Capacity (lt/hr): $4\text{L/h} \geq 85^\circ\text{C}$
Heating Power (W): 420W
Net Size: 435mm*425mm*260mm

FEATURES



WATER TEMPERATURES

3 Temperature Selection (Hot/Cold/Normal water, compressor cooling).



ECO MODE

ECO Mode automatically power off the heating and cooling system at night by smart detector.



FIXED WATER VOLUME

Fixed water volume function. Set your hands free.



UF MEMBRANE FILTER

Remove bacteria, iron-rusts, colloids and impurities in water.



UV STERILIZE WATER

Post UV Sterilize water just before you drink, Absolutely Bacteria Free



FILTER REMINDER

Filter life time reminder



TOUCH CONTROL

Touch control, modern and market design.



COOLING COMPRESSOR

Compressor for cooling: adopt stable, high efficiency and low noise compressor.



PP & CARBON BLOCK FILTER

Carry out coarse filtration of original water, and filter put mud, sand, impurity, iron rust and suspension, etc. Absorb unusual colours and odours; remove residual chlorine and organic substances in water.

INTRODUCTION TO 4 STAGE FILTER

STAGE	FILTER	FUNCTION
Stage 1	PP fibre filter	Carry out coarse filtration of original water, and filter put mud, sand, impurity, iron rust and suspension, etc.
Stage 2	& Carbon block filter	Absorb unusual colours and odours, remove residual chlorine and organic substances in water.
Stage 3	UF Membrane filter	Remove bacteria, iron-rusts, colloids and impurities in water.
Stage 4	UV Sterilize water	Post UV Sterilize water just before you drink, Absolutely Bacteria Free

STANDING WATER DISPENSER & PURIFIER WITH RO

(With Hot & Cold Water System)



Model: JL1665S-RO

Power Supply Voltage & Frequency (V/Hz): 220V/50HZ

Power Consumption: 535W

Purification Capacity (1t/day): 7.8L/h

Total Water Tank Capacity (1t): 4.6L

Cold Water Tank Capacity (1t): 3.6L

Cooling Capacity: 2L/H

Cold Water Temperature (°C): $\leq 10^{\circ}\text{C}$

Cooling Current (W): 1.0A

Hot Water Tank Capacity (1t): 1L

Heating Capability: 4L/h

Hot Water Temperature(°C): $\geq 85^{\circ}\text{C}$

Heating Power (W): 420W

Net Size: 1045mm*360mm*310mm

FEATURES



WATER TEMPERATURES

3 Temperature Selection (Hot/Cold/Normal water, compressor cooling).



CHILD LOCK

LED indicator, child-proof lock



BOTTLE FREE

Bottle Free water drinking system



4 STAGE FILTER

Four stage filter direct drinking water purifier

1. PP fibre filter
2. Front active filter
3. RO filter
4. Post active carbon filter



RO FILTER

RO (reverse osmosis) water filtration system
0.0001 μm high precision filtration.



EASY TO REPLACE

Easy to replace filter (one touch system)



WATER LEAKAGE PROTECTION

Water Leakage Protection device



COOLING COMPRESSOR

Compressor for cooling: adopt stable, high efficiency and low noise compressor.



WATER CONTROL

Automatic water control



WATER PUMP

Water Pump (Capacity 100gpt)

DESKTOP WATER PURIFIER (DIRECT DRINKING)

FEATURES



WATER TEMPERATURES

3 Temperature Selection (Hot/Cold/Normal water, compressor cooling.



COOLING COMPRESSOR

Compressor for cooling: adopt stable, high efficiency and low noise compressor.



WATER PUMP

Water Pump (Capacity 100gpt)



4 STAGE FILTER

Four stage filter direct drinking water purifier
1. PP fibre filter
2. Front active filter
3. RO filter
4. Post active carbon filter



CHILD LOCK

LED indicator, child-proof lock

Model: YLR-1.5-JXT-11

Hot Water Child Lock

Hot and Cold water dispenser with 4 stage filter. DANFU compressor.

PP+CTO+RO+T33

Purified water capacity: 100GDP

With hot water

Heating Capability: $\geq 5L/h$, 85-95°C

Product Size: 270*420*580

Packing Size: 320*480*660

Rated Voltage: 220-240V

Rated Frequency: 50/60Hz



WALL-MOUNTED WATER PURIFIER

Model: JX-RO-102

Voltage Frequency: AC230/50HZ

Power: 30W

Water Pressure: 0.1-0.4MPa

Environment Temperature: 5-40°C

Filter Fineness: 0.0001μm

Purified Water Capacity: 100GDP

Filter Configuration: PP+UDF+CTO+RO+T33

Product Size: 280*180*480

Packing Size: 490*400*370

13.0kgs 14.0kgs

FEATURES



5 STAGE FILTER



WATER PUMP



DIGITAL DISPLAY



12 LTR STORAGE TANK



FILTER REMINDER



Purefa
A Step Towards Purity

Colours Available: Red, Golden & Silver

STANDING WATER DISPENSER & PURIFIER WITH RO

(With Hot & Cold Water System)



FEATURES



WATER TEMPERATURES

3 Temperature Selection (Hot/Cold/Normal water, compressor cooling).



CHILD LOCK

Child-proof lock



COOLING COMPRESSOR

Compressor for cooling: adopt stable, high efficiency and low noise compressor.



LED indicator

Model: YLR-1.5-JX-11

Hot Water Child Lock

PPF+UDF+CTO+RO+T33

R134a compressor cooling, compressor is DANFU.

Hot Tank: 0.8L

Stretched Cold Tank: 3.3L

Cooling Capability: $\geq 2\text{L/h}$, $5-10^{\circ}\text{C}$

Heating Capability: $\geq 5\text{L/h}$, $85-95^{\circ}\text{C}$

Purified water capacity: 100GDP

Product Size: $270 \times 420 \times 1100$

Packing Size: $320 \times 480 \times 1235$

Rated Voltage: 220-240V

Rated Frequency: 50/60Hz

HOT AND COLD WATER DISPENSER WITH REFRIGERATOR

FEATURES



WATER TEMPERATURES

3 Temperature Selection (Hot/Cold/Normal water, compressor cooling).



CHILD LOCK

Child-proof lock



COOLING COMPRESSOR

Compressor for cooling: adopt stable, high efficiency and low noise compressor.



LED indicator

Model: YLR-1.5-JXR-12

3 TAP WITH CHILD LOCK

Refrigerator Storage Cabinet

Hot and Cold Water

R134a DANFU compressor cooling

Stretched cold tank, 3.3L

Silicon water outlet pipe

NEW ABS material of plastic parts

Cooling Capability: $\geq 2\text{L/h}$, $5-10^{\circ}\text{C}$


Heating Capability: $\geq 5\text{L/h}$, $85-95^{\circ}\text{C}$

Product Size: $310 \times 340 \times 1050\text{mm}$

Packing Size: $330 \times 360 \times 1080\text{mm}$

Rated Voltage: 220-240V

Rated Frequency: 50-60Hz

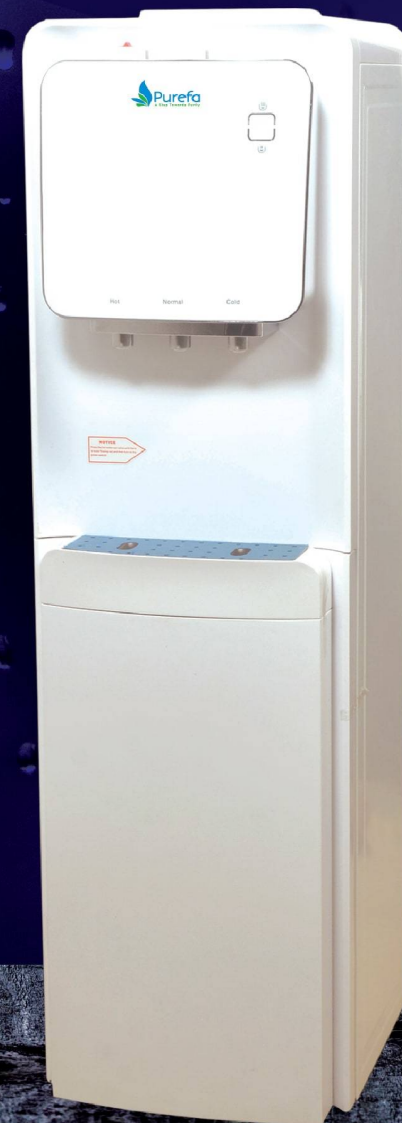



Phone: 0091-22-28651292/93 | Fax 0091-22-28651292 | Mob: +91 9321431187
E mail: meet_gala@yahoo.co.in / meetrefrigeration@yahoo.com

Shop No. 22, A/4, Khajuria Tank Road, Kandivali (West), Mumbai - 400 067.
INDIA